


**STUFE 3  
EXZELLENT**



Durch die Synchronpore/dem integrierten Trittschall ist der Gehkomfort bei Böden der Stufe 3 exzellent. Bei Multilayern mit SPC-Träger ist eine LVT-Zwischenschicht integriert.



Die Nutzschicht beginnt ab 0,5 mm.

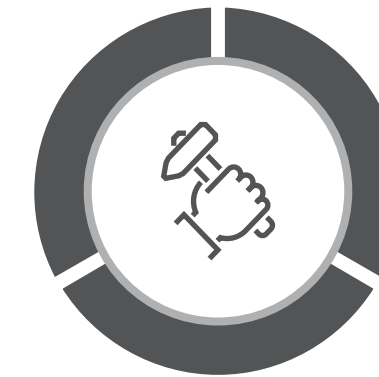

Leichte Verlegung durch Drop-Lock mit integriertem Trittschall.




Böden der Reihe ECO sind FSC-zertifiziert sowie vom Sentinel Haus Institut als wohngesund und emissionsarm zertifiziert worden.


**STUFE 2  
SEHR GUT**



Im Gehkomfort Stufe 2 ist bei allen Böden der SPC-Basis-Kategorie eine Trittschalldämmung bereits integriert.

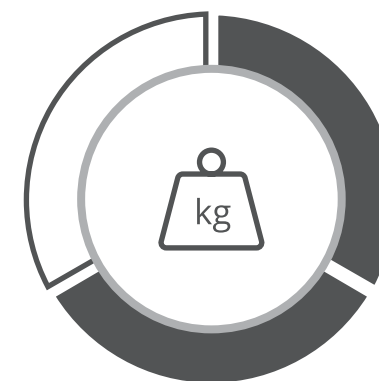

Die Nutzschicht liegt zwischen 0,3 und 0,4 mm.

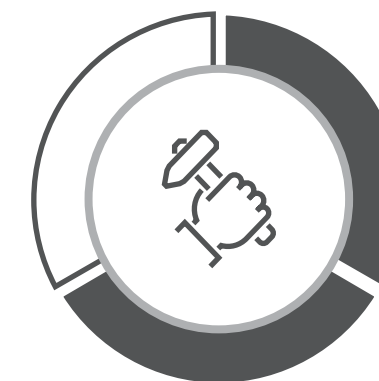

Leichte Verlegung durch Klickverbindungen wie Uniclic.




Böden der Reihe LVT sind recyclebar. Böden der Reihe SPC besonders langlebig. Außerdem sind Böden dieser Stufe zertifiziert wohngesund und emissionsarm.

**STUFE 1  
GUT**



Die Nutzschicht liegt unter 0,3 mm.

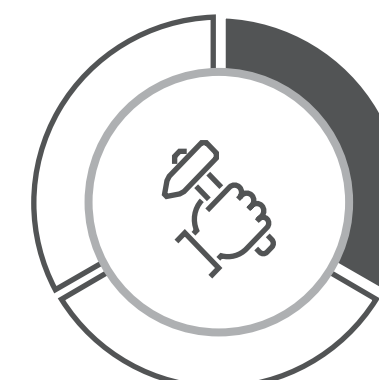

Durch die Verlegung mit Verklebungsverfahren ist ein gewisses Know-how erforderlich.



Böden der Reihe LVT sind recyclebar. Böden der Reihe SPC besonders langlebig.

**WALKING COMFORT**

**DURABILITY**

**EASY TO LAY**

**ENVIRONMENTALLY  
COMPATIBLE**


**LEVEL 3  
EXCELLENT**



Due to the synchronous pore/the integrated impact sound, the walking comfort of level 3 floors is excellent. Multilayers with SPC backing have an integrated LVT intermediate layer.



The wear layer starts from 0.5 mm.

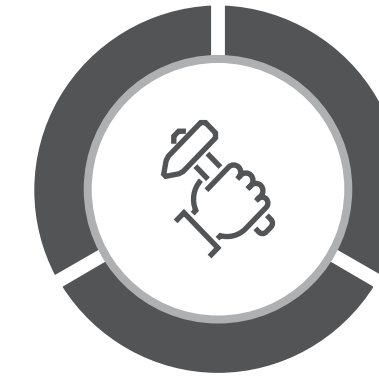

Easy installation due to drop-lock with integrated impact sound.



ECO floors are FSC-certified and certified by Sentinel Haus Institut for healthy living and low emissions.


**LEVEL 2  
VERY GOOD**



In walking comfort level 2, all floors of the SPC basic category have an impact sound insulation already integrated.



The wear layer is between 0.3 and 0.4 mm.

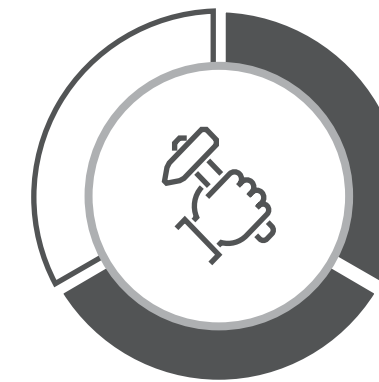


Easy installation due to click connections such as Uniclic.




LVT floors are recyclable. SPC series floors are particularly durable. In addition, floors of this level are certified healthy for living and low in emissions.

**LEVEL 1  
GOOD**

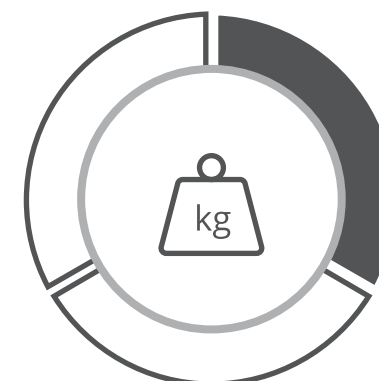

The wear layer is less than 0.3 mm.

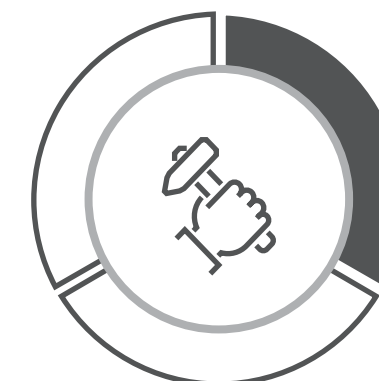

Some know-how is required due to the installation with bonding methods.



LVT floors are recyclable. SPC series floors are particularly durable.